



GARRISON




IPE DECKING

Ipe – also known as Brazilian Walnut – is the number one choice for decking/deck flooring. Renowned for its unparalleled durability, Ipe's natural oils and dense fibers fortify it against decay, mold, fungi, and insects, eliminating the need for insect-proofing. With an 'A1' fire resistance rating—on par with concrete and steel— Ipe ensures safety and longevity in outdoor spaces. Our meticulous kiln-drying processes guarantee quality and consistency, with a beautiful Select Grade look.

DIMENSIONS*	1" T x 6" W
PRODUCT CODE	DF512PI
LENGTH	8 feet - 18 feet
PRODUCT CODE	DF512PIL
LENGTH	20 feet - 22 feet

EDGE DETAIL	Eased 4 Edges (E4E)
FINISH	Unfinished
TEXTURE	Smooth 4 Sides (S4S)
SPECIES	Ipe (Brazilian Walnut)
JANKA RATING	3,684

*Common: 1" x 6" Actual: 3/4" x 5-1/2"

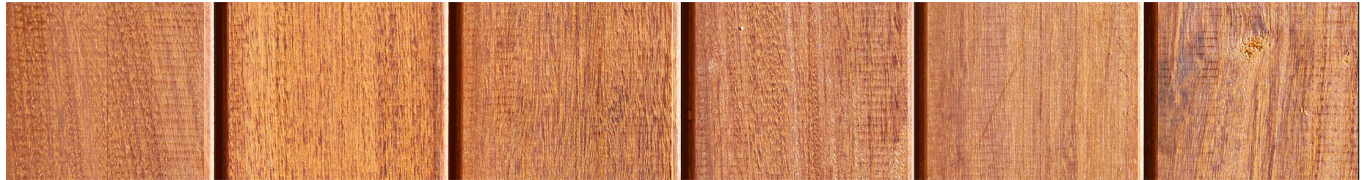

SELECT GRADE



RESISTANT TO TERMITES



RESISTANT TO MOLD AND FUNGI



RESISTANT TO WEATHER CHANGES

IPE Decking Boards.

While Ipe may resist traditional finishes, regular oil maintenance is recommended to uphold its hydration and original allure. Moreover, to fortify against cracks, checks, and splits, the material arrives with end grain meticulously painted with a wax sealer, providing additional protection. Should the need arise, installers can easily cut or sand the boards to suit specific installation requirements.




SCAN WITH PHONE CAMERA FOR IMAGES AND MORE INFORMATION

www.garrisoncollection.com

(800) 300-5158 | info@garrisoncollection.com


INSTALLATION



SCREW

PRE-DRILL HOLE

INSERT SCREW
INSERT PLUG (OPTIONAL)

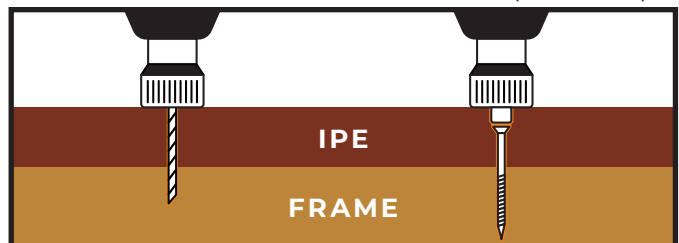

Sample Variation Disclaimer: Due to the natural variations in color, grain, and texture inherent in the hardwood products used to design this flooring, flooring will vary from plank to plank and may vary slightly from this sample. This small chip of flooring only represents a general expectation of this product. Please expect variation in all flooring. Garrison accepts no liability for claims due to variations in color, grain, and/or character between this sample and your installed floor. INSTALLATION IS ACCEPTANCE.

End Grain Disclaimer: The End Grain is painted with a Wax Sealer, the protection to avoid, cracks, checks, and splits. Can be cut or sanded if needed. It can be removed with sandpaper, sanding only on the face not the end grain. If cut, a wax must be applied again to avoid cracking with time.

Order Disclaimer: We recommend buying all wall slats at the same time for your project. Otherwise, we cannot guarantee matching wall slats if adding to an order. In the event additional wall slats needs to be ordered, wall slats may differ in color, grain, texture, and/or size due to inherent variations in natural wood products. When ordering, always factor in at least one full box for any/all unforeseen damage that may occur during the life of your wall slat. Please consider and allow for a waste factor of 3-5% on normal layouts and 5-10% on detailed layouts such as 45-degree angles, patterns, border work, etc.